Barn Hotel - Outside Play Areas

Professionalised provisional plans and budgetary surface-area take-off from the two hand sketches supplied.

Area	Measurements visible on sketch	Provisional area	Suggested quote allowance*
Rear / lodge-side play area	8.0 m top; 8.0 m bottom; 25.0 m length	≈ 235 m²	≈ 250 m² (+~6%)
Front garden play area	12.5 m top; 14.5 m left; 5.0 m bottom	≈ 136 m²	≈ 145 m² (+~7%)

Important: the irregular/curved boundaries are not dimensioned, so neither area can be calculated exactly from the sketches alone. The figures above are **budgetary estimates** obtained by proportioning the drawn outlines against the dimensions shown. They are suitable for an initial quote, not for ordering final material.

*The suggested quote allowance is a simple rounded procurement allowance. Actual waste factors depend on roll/tile size, seam layout, cuts, edging and the installer's method.

Plan 1 - Rear / Lodge-Side Play Area

Indicative plan - not a survey drawing

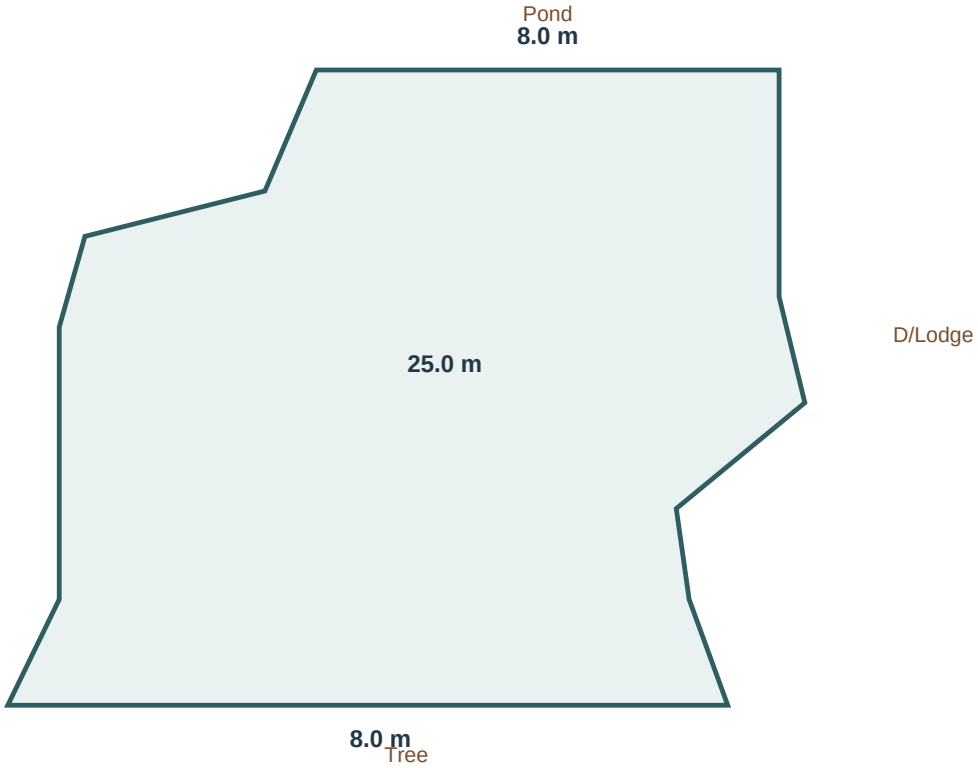

Provisional take-off: approximately 235 m². For a preliminary quotation, allowing about **250 m²** gives modest headroom for cutting/waste. The 8 m end widths and 25 m length are shown; the side offsets/jogs need site dimensions for a firm quantity.

Measurements needed for a firm area: widths at each change of direction (or perpendicular offsets from the 25 m centre line), plus the distance along the length to each change point.

Plan 2 - Front Garden Play Area

Indicative plan - not a survey drawing

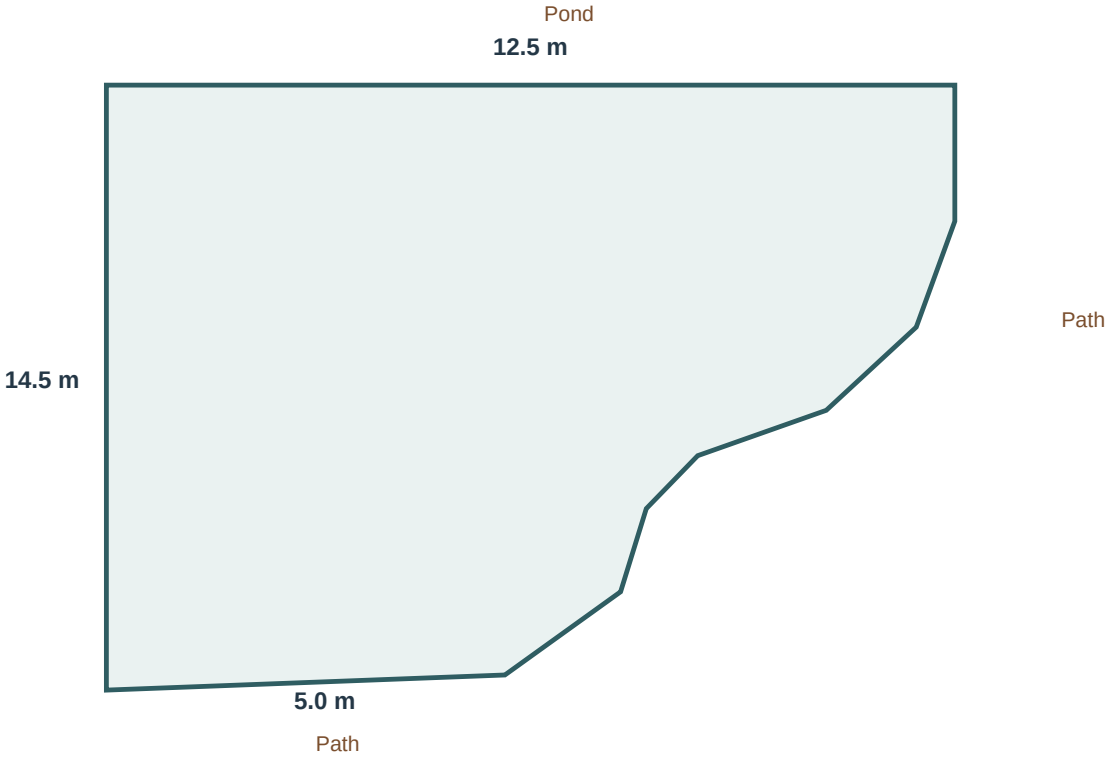

Provisional take-off: approximately 136 m². For a preliminary quotation, allowing about **145 m²** gives modest headroom for cutting/waste. The curved path-side boundary is the main source of uncertainty.

Measurements needed for a firm area: one or more intermediate widths from the straight left boundary to the curved path edge, measured at known distances down the 14.5 m side. Three to five offsets would normally be enough for a good take-off.

Prepared from client-supplied hand sketches. Dimensions should be checked on site before purchase or installation.